

40GBase-iSR4 QSFP⁺ Transceiver

Descriptions:


- 10-Gbps × 4-Ch Duplex
- Low power dissipation < 1.5W (Power Level-1)
- Full Digital Diagnostics Monitor Interface
- Electrical Hot-Plug Compatible
- 100/150-m Link Length via OM3/OM4
- RoHS Compliance and Lead-Free

Certifications:

- Ethernet Packet Test Passed
- Entire Characterization Test Passed
- Full Reliability Test Passed

Applications:

- 40GBASE-SR4 Ethernet with 10GBASE-SR Interoperability
- InfiniBand, Fiber Channel and PCIe Interface
- Proprietary protocol and high-density applications
- High-Performance Computing

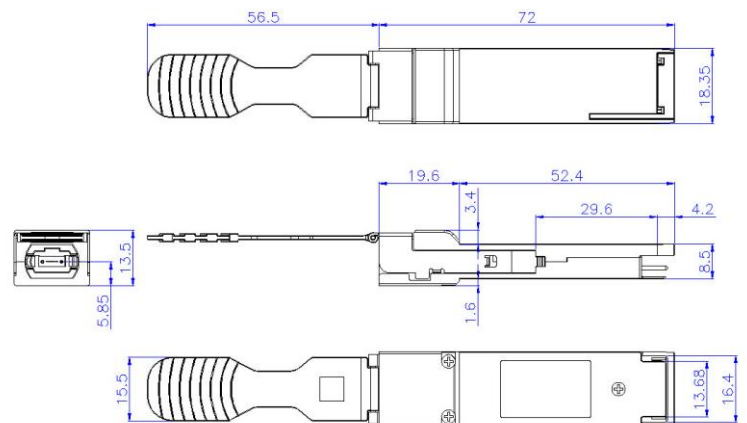

UNIT:mm

Product Selections:

P/N	Data Rate (Gbps)	TX	RX	TX(dBm) Min	TX(dBm) Max	Reach	Temperature (deg C)	Description
C04010QIXM000	40	850 VCSEL	PIN	-7.6	-1	150m	0~70	QSFP i-SR4